


20 XPT *Easy Loader Series 20 Ton Tag - (2) 20K ABS Air Brake Axles*

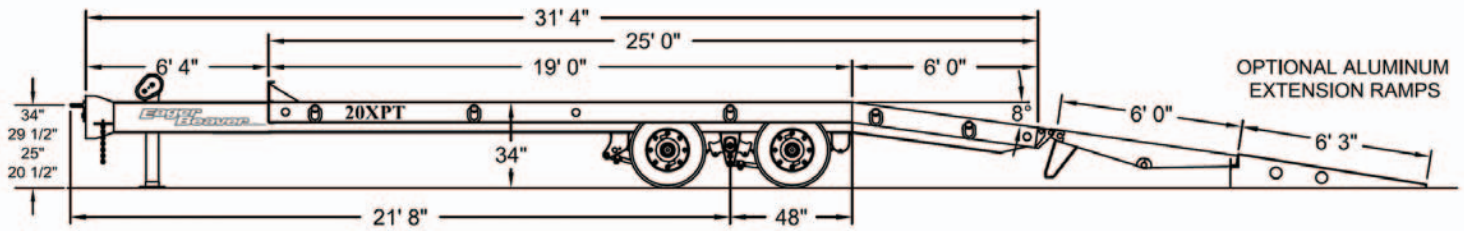

Capacity: 40,000 lbs. Trailer Weight: 8,380 lbs.
Deck Width: 8 ft. 6 in. Length: 19 ft. Height: 34 in.
Hi Tensile V-50 Steel Mainframe
Pierced Crossmembers
Suspension: Hutch H-9700, Three Leaf, Capacity 50,000 lbs.

Heavy Duty Jack
Drawbar Storage Area
8° Beaver Tail (Safe Low Loading Angle)
Patented "ROTO RINGS"® Swivel 360°
100% Sealed Modular Wiring Harness

SPECIFICATIONS

Frame	Mainrails: W14" x 22 lbs. wide flange I-Beam, one piece cold formed Hi-tensile 50,000 P.S.I. steel mainrails from front to drawbar to rear of trailer
Crossmembers	6" x 3.7 lbs. per ft. I-Beam pierced through mainbeam
Decking	Nominal 2" Hardwood
Headboard	Headboard: 8" high, full width of trailer Drawbar Storage Area
Lights	Sealed L.E.D., 12 volt, DOT approved
Wiring Harness	USA Star PLUS Sealed Modular Wiring Harness w/ 7-Way ATA Plug
Hitch	One piece solid cast steel (adjustable) lunette eye & flange mount
Safety Chains	Two 1/2" Blue-Krome plated high test, safety hook w/ latch
Parking Jack	70,000 lbs. static / 40,000 lbs. lift, (Heavy Duty 2-Speed screw type)
Tie Down	Five per side - Patented "ROTO RINGS"® Swivel 360°
Colors	Yellow (Standard), Red, Black

RUNNING GEAR

Tires	Eight (8) 215/75R 17.5 (H) Steel Belted Radial
Hubs/Wheels	Four Disc Type Hubs, Eight 6.75 x 17.5, 8-Bolt, Hub-Piloted Disc Wheels
Suspension	Hutch H-9700, Three leaf, capacity 50,000 lbs. tandem
Axles	Two 5" diameter 22,500 lbs. each, H.M. series bearings (maximum axle track width)
ALL WHEEL ABS	Anti-Lock Brake System 4S2M Sensor All Wheels Two Modular Valves
Parking Brake	Spring Brake on All Axles

OPTIONS

Additional Deck Length & Width (20'-21'-22'-23'-24' Optional Lengths) (96" Optional Width)
 Additional "ROTO-RINGS"®
 Tool Box Lid (Lockable) Optional: Expanded Metal Tray Plate
 Spare Tire & Rim 215/75R 17.5 (H) Optional: Spare Tire Carrier
 Traction 2" x2" Angle 6" C/C Wheel Paths Optional: Traction Center Section, Bucket Pocket or Plate
 Ramps Wood (standard); Ladder (Optional N/C); Electric-Hydraulic 36" Wide x 8' Long
 Extension Ramps T-6 Alum. 22" x 75" 8-degree angle (SET)
 Parking Jack Optional: Jack mounted on Headboard
 Apitong Decking in lieu of Oak
 Paint (other than standard Yellow) Price on Request