


25 TXL-3 25 Ton Tilt Bed Tag - (3) 20K ABS Air Brake Axles

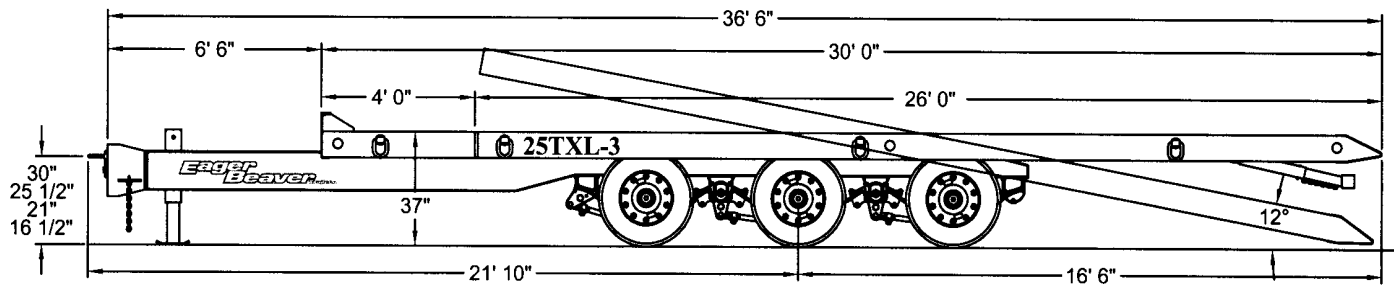

Capacity: 50,000 lbs. Trailer Weight: 12,200 lbs.

Deck Width: 8 ft. 6 in. Tilt: 26 ft. Stationary: 4 ft. Height: 37 in.

Hi Tensile V-50 Steel Mainframe

Pierced Crossmembers

Axles/Suspension: Hutch H-9700 3 Leaf Capacity: 75,000 lbs.

Heavy Duty Jack

Drawbar Storage Area

Cold-Formed Drawbar & Nose Plate

Patented "ROTO RINGS"® Swivel 360°

100% Sealed Modular Wiring Harness

SPECIFICATIONS

Frame (Chassis)	Mainrails: W14" x 26 lbs. wide flange I-Beam, one piece cold formed, 50,000 P.S.I. steel
Frame (Upper)	Mainrails: 8" x 15 lbs. wide flange I-Beam, 50,000 P.S.I. steel
Crossmembers (Upper Deck)	6" x 12.5 lbs. per ft. I-Beam pierced through mainbeam
Decking	Nominal 2" Hardwood
Headboard	8" high, full width of trailer Drawbar Storage Area
Deck Locks	Dual adjustable toggle lock with retainer pin
Cushion Cylinder	Two 3 1/2" Bore Cushion Cylinders
Wiring Harness	Sealed L.E.D. Lights & USA Star PLUS Sealed Modular Wiring Harness w/ 7-Way ATA Plug
Hitch	One piece solid cast steel (adjustable) lunette eye & flange mount
Safety Chains	Two 1/2" Blue-Krome plated high test, safety hook w/ latch
Parking Jack	12,000 lbs. static / 40,000 lbs. lift (Heavy Duty drop leg screw type)
Tie Down	Four per side - Patented "ROTO RINGS"® Swivel 360°
Colors	Yellow (Standard), Red, Black w/ matching RPC Undercoating

RUNNING GEAR

Tires	Twelve 215/75R17.5 (H) Michelin Steel Belted Radial
Hubs/Wheels	Six Disc Type Hubs, Twelve 6.75 x 17.5, 8-Bolt, Hub-Piloted Disc Wheels
Suspension	Hutch H-9700, three leaf, capacity 75,000 lbs. tandem (Adjustable Alignment)
Axles	Three 5" diameter 20,000 lbs. each, H.M. series bearings (maximum axle track width)
Brakes	Dexter 12 1/4" x 7 1/2" Air, "S" Cam., Auto Slack Adjusters
ALL WHEEL ABS	Anti-lock brake system 4S3M, Sensors on (2) Axles, Two modulator valves
Parking Brake	Spring Brakes on All Wheels

OPTIONS

Additional Deck Length:	(N/A)
Additional "ROTO-RINGS"®	
Tool Box Lid (Lockable)	Optional: Expanded Metal Tray Plate
Spare Tire & Disc Wheel 215/75R17.5 (H)	Optional: Spare Tire Carrier
Traction Path Tilt Bed (rear section only)	
Parking Jack	Optional: 2-Speed Jack Optional: Jack mounted on Headboard Optional: 2-Speed Landing Gear is Available
Apitong Decking in lieu of Oak	
Paint (other than standard Yellow)	Price on Request