

Hi-Clearance Gooseneck Standard On All Paver Lowboys...

35 GSL/PT


35 Ton Detachable Gooseneck Wetline, Dual Axle Air Ride Suspension, with 4' Rear Riser, Wheel Covers, Taper Beam Design

- CAPACITY: 70.000 lbs.
- Trailer Weight: 18,700 lbs
 Overall Width: 102", Length: 44' 5"
 Tires: Eight 255/70R22.5 (F
 Brakes: Air (Full ABS System)

- Deck Width: 102", Length: 22'
 Height: 24" (Loaded)
 Tires: Eight 255/70R22.5 (H) Radial

Engineered to Exceed Your Demands...

We redesigned the contours of our Gooseneck to perform in a greater number of unanticipated circumstances!... and made it Standard on All Models.

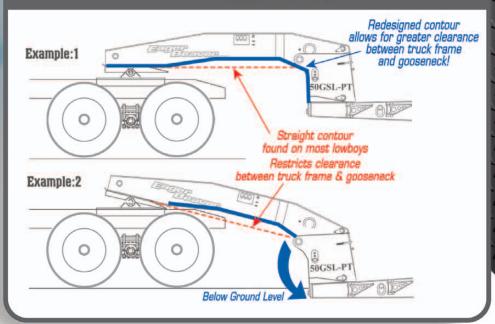

50 GSL/PT

50 Ton Detachable Gooseneck Wetline, Tri Axle Air Ride Suspension, 4' Rear Riser, Wheel Covers, Taper Beam Design

- CAPACITY: 100.000 lbs.
- Deck Width: 102", Length: 24'
- Height: 24" (Loaded)
- Trailer Weight: 22,700 lbs
 Overall Width: 102", Length: 52' 11"
 Tires: Twelve 255/70R22.5 (H) Radial
 - Brakes: Air (Full ABS System)

55 GSL/PT

55 Ton Detachable Gooseneck Wetline, Tri Axle Air Ride Suspension, with 4' Rear Riser Wheel Covers, Taper Beam Design

- CAPACITY: 110,000 lbs.
- Trailer Weight: 23,425 lbsOverall Width: 102", Length: 52' 11"
- Deck Width: 102", Length: 24'
- Height: 24" (Loaded)
- Tires: Twelve 275/70R22.5 (H) Radial
- Brakes: Air (Full ABS System)

60 GSL/PT

60 Ton Detachable Gooseneck Wetline, Tri Axle Air Ride Suspension, with 4' Rear Riser, Wheel Covers, Taper Beam Design

- CAPACITY: 120,000 lbs.
- Trailer Weight: 25,000 lbs
 Overall Width: 102", Length: 52' 11"
 Deck Width: 102", Length: 24'
- Height: 24" (Loaded)
- Tires: Twelve 275/70R22.5 (H) Radial
- Brakes: Air (Full ABS System)





Optional Features Available on

LOWBOWNET SERVIES



Extra Deck Length



Lift 2nd and 3rd Axles



Wood Filled Rear Riser and Trunnion Area



Spring Loaded Front Flip Ramps



Roller Stop



Oversize Load Sign



Complete Set Up for Future Axle





Standard Features On All Paver Lowboys...



Designed to rotate ROTO-RING. 360° for safer tying down of equipment. The ring always offers maximum strength and security no matter which direction the force is applied. There is less wear on chains, binders and equipment.



ALL WHEEL ABS (Anti-Lock Brakes) With Spring Brakes on all axles.



WIRING HARNESS 100% Sealed Wiring Harness. USA Harness "PLUS" (positive lock under seal).



LOW PROFILE REAR RISER 4' riser gives you a 16 degree load angle to trunnion a real deal for loading rollers and small pavers.



OUTRIGGERS Outriggers are made of cast steel instead of cast iron making the deck



APITONG DECK

Apitong deck is a rugged hardwood that wears better over time. Lighter than other decking materials to reduce overall weight.



"NAME BRAND TIRES" Full Warranty and National Distributor Support



CUSH AIR RIDE

The most superior air ride on the market today.

- Override chains standard equipment.
- "Cush Align" 1" axle adjustment per side. Patent pending.



HUB PILOTED WHEELS

Outboard brake drums for easier maintenance.



TAPERED BEAM DESIGN

Offers a 3 degree load angle, the lowest in the industry.

Ideal for loading machines with low ground clearance like Pavers and Milling Machines.



LIFT AXLE

Quick and easy to operate. Reduces turning radius & tire wear.



HYDRAULIC HAULING PIN

Stronger than air locking pins less maintenance cost and will not freeze in cold weather.

Sales (800) 257-8163 Parts (800) 338-7088

Customer Service (800) 722-8803 ext: 3251



EagerBeaverTrailers.com