


50 GLB 50 Ton Fixed Gooseneck - ABS Air Brake Axles

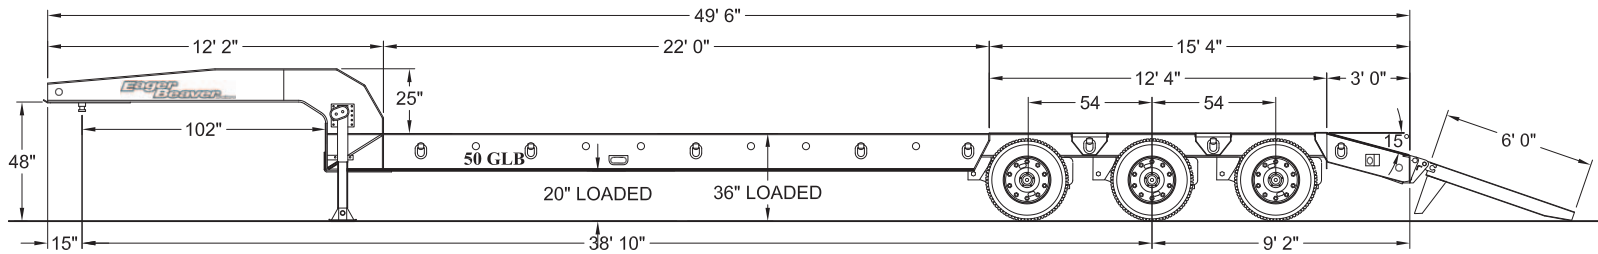

SPECIFICATIONS

Capacity: 100,000 lbs. **Trailer Weight:** 21,600 lbs.

Deck	Width: 8 ft. 6 in. Height: 36 in. (Loaded) Overall Length: 49 ft. 6 in. (with 102" swing neck)
Frame	Mainrails: fabricated 24" Deep I-Beam. Siderails: fabricated 16" Deep I-Beam
Crossmembers	10" x 12 lbs. per ft. I-Beam, pierced through mainbeam (18" spacing)
Decking	1½" Apitong (Full Width)
Tail Roller	Weld on Tail Roller with Weevil Pockets and two support rollers
Fairlead Roller	Fairlead Roller in Rear of Gooseneck with Weevil Pockets
Winch Loop	Winch Loop on Front of Gooseneck with Full Width Integrated Skid Pipe
Weevil Pockets	Mounted every 6 ft on Outside of Side Rail and on one Bolster
Wiring Harness	Sealed LED Lights & USA Star PLUS Sealed Modular Wiring Harness
Gooseneck	4" Relief Style and 102" Swing Clearance STD (Other Lengths Available)
Tie Down	8- Roto Rings Per Side; Fixed D-Rings on Rear of Neck and Tailboard
Colors	Black, Yellow, Blue (standard) Imron Paint

RUNNING GEAR

Tires	Twelve 255/70R22.5 (H) Steel Belted Radial
Hubs/Wheels	Disc Type Hubs, 8.25 x 22.5 Disc Type Wheels, Stemco Oil Seals, Hub Piloted
Suspension	Air Ride (Combined Capacity 75,000 lbs) with Dump Valve; Lift 1st Axle
Axles	Three 5" Diameter 25,000 lbs. each, H.M. series bearings
Brakes	16 ½" x 7" Air, "S" Cam, Automatic Slack Adjusters
All Wheel ABS	Anti-lock brake system 4S3M, Sensors on (2) Axles, 3 Modulator Valves
Parking Brake	Spring Brakes on All Wheels

OPTIONS

Holland-Neway TR-8750 Walking Beam Spring Suspension
 Bolt On Tail Roller with Weevil Pockets and two support rollers
 Air Lift Deck Rollers – one set 2' Forward of Suspension, one set 6' aft of Gooseneck
 Four Inch Dia. stanchion pockets (81" between) – one set 4' aft of Gooseneck, one set on forward Bolster, includes stanchion pipes and stanchion pipe rack on Gooseneck
 Lockable Toolbox in Gooseneck Expanded Metal Floor in Gooseneck Heavy Duty Drop Leg Supports
 Dual Air & Electrical Connections - Front of GN and Front of Bed
 Manual Raise and Lower Valve
 Inverted 5th Wheel
 Oak Decking in lieu of Apitong
 Aluminum Wheels
 Spare Tire Carrier with or without Mounted Spare
 Tire & Disc Wheel 275/70R22.5 (H) Upgrade (Yokohama)
 Paint (other than standard Black, Yellow, Blue) Price on Request



Call (800) 257-8163 for more information