


10 SSE 10 Ton Electric Brake Super Single

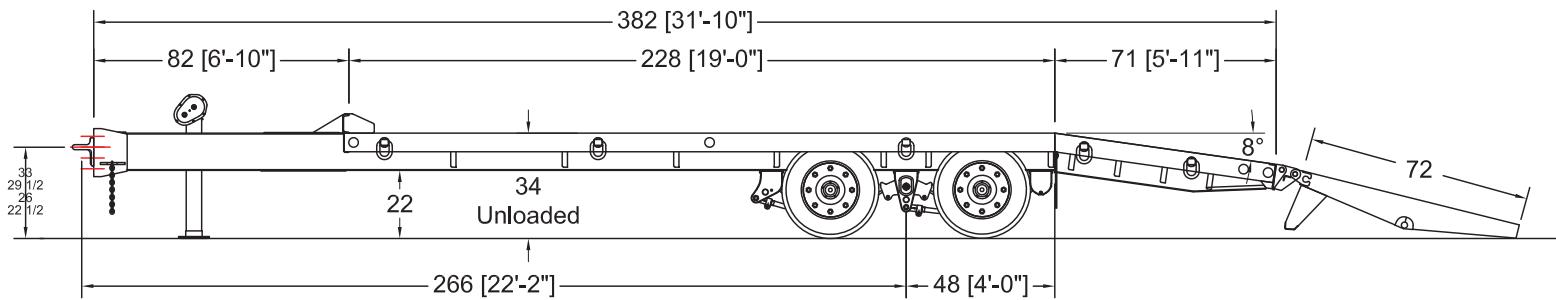

Deck Width: 8'6" Length: 19'

Hi Tensile V-50 Steel Mainframe

Pierced Main Rails

Suspension: Hutch H-9700

Drawbar Storage Area

Dexter Heavy Duty Axles

Patented "ROTO RINGS" Swivel 360

Cold Formed Drawbar & Nose Plate

SPECIFICATIONS

Capacity: 20,000 lbs **Trailer Weight:** 5,995 lbs Heavy Duty Jack

Frame:	Mainrails: 12" wide flange I-Beam, one piece cold formed Hi-Tensile 50,000 PSI steel main beams from front of drawbar to the rear of the trailer
Crossmembers:	4" ft I-beam pierced through main beam
Decking:	DDS Lumber Deck with deck bolts and washers
Headboard:	6" high, full width of trailer
Lights:	Sealed LED, 12 volt, DOT approved
Wiring Harness:	USA Harness PLUS Sealed Modular Wiring Harness with 7-Way ATA Plug
Hitch:	One piece solid cast steel (adjustable) lunette eye and flange mount
Safety Chains:	Two 1/2" Blue Krome plated high test, safety hook with latch
Parking Jack:	12,000 lbs. static, 10,000 lbs lift (Heavy Duty drop leg screw type)
Tie Downs:	Five per side – Patented "ROTO RINGS" Swivel 360
Color:	Black

RUNNING GEAR

Tires:	(4) 235/75R17.5 (H) Super Single Sumitomo Tires
Hubs/Wheels:	Four Disc Type Hubs, Four 6.75 x 17.5 8 bolt Hub Piloted Disc Wheels Oil Seals
Suspension:	Hutch H-9700, 2 leaf, capacity 20,000 tandem
Axles:	Two 5" Heavy Duty Dexter Axles, HM Series 10,000 lbs. capacity each
Brakes:	12 1/4" x 4" Electric
Break-away:	12 Volt, wet cell battery with integrated battery charging system

Call (800) 257-8163 for more information

Eager Beaver Trailers®