


12 SSE 12 Ton Electric Brake Super Single

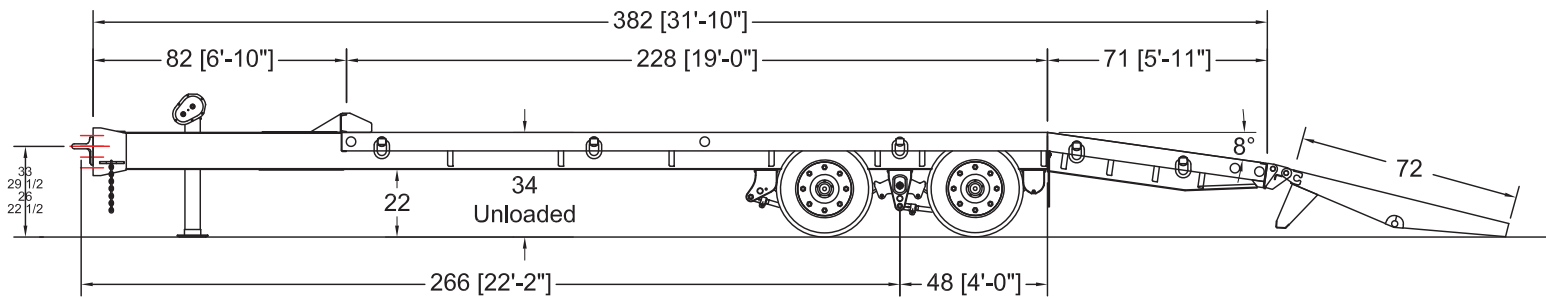

Deck Width: 8'6" Length: 19'
Hi Tensile V-50 Steel Mainframe
Pierced Main Rails
Suspension: Hutch H-9700

Toolbox in Drawbar
Dexter Heavy Duty Axles
Patented "ROTO RINGS" Swivel 360
Cold Formed Drawbar & Nose Plate

SPECIFICATIONS

Capacity: 24,000 lbs **Trailer Weight:** 6,200 lbs Heavy Duty Jack

Frame: Mainrails: 12" wide flange I-Beam, one piece cold formed
Hi-Tensile 50,000 PSI steel main beams from front of drawbar to the rear of the trailer

Crossmembers: 4" I-beam pierced through main beam

Decking: DDS Center Deck, Apitong Outer Deck, secured with deck bolts and washers

Headboard: 6" high, full width of trailer Drawbar Storage Area

Lights: Sealed LED, 12 volt, DOT approved

Wiring Harness: USA Harness PLUS Sealed Modular Wiring Harness with 7-Way ATA Plug

Hitch: One piece solid cast steel (adjustable) lunette eye and flange mount

Safety Chains: Two 1/2" Blue Krome plated high test, safety hook with latch

Parking Jack: 12,000 lbs. static, 10,000 lbs lift (Heavy Duty drop leg screw type)

Tie Downs: Five per side – Patented "ROTO RINGS" Swivel 360

Color: Black

RUNNING GEAR

Tires: (4) 235/75R17.5 (H) Super Single Sumitomo Tires

Hubs/Wheels: Four Disc Type Hubs, Four 6.75 x 17.5 8 bolt Hub Piloted Disc Wheels Oil Seals

Suspension: Hutch H-9700, 2 leaf, capacity 24,000 tandem

Axles: Two 5" Heavy Duty Dexter HM Series 12,000 lb capacity each

Brakes: 12 1/4" x 5" Electric

Break-away: 12 Volt, wet cell battery with integrated battery charging system



Call (800) 257-8163 for more information